


# Industrial filter technology

For roof surfaces up to 1,500 sqm

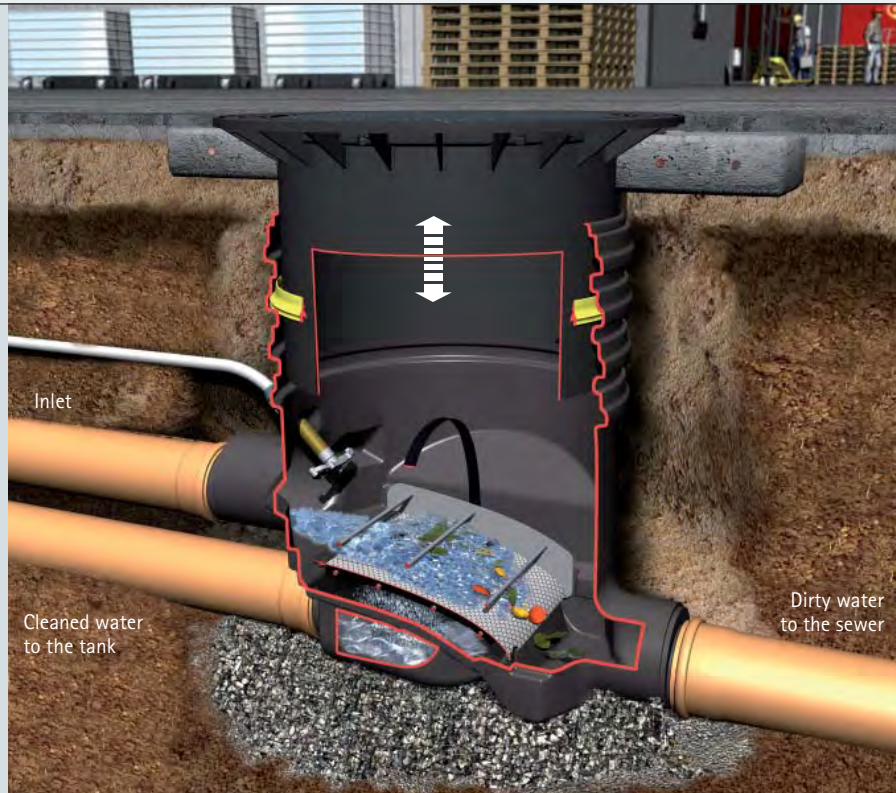

## Optimax-Industrial filter external

- | For roof surfaces up to 1500 sqm
- | Patented filter technology Smooth installation depths from 800 – 1200 mm (31.5-47.2") using the telescopic dome shaft Maximum roof surface of 750 sqm with connections DN 150 and 1500 sqm with DN 200

**Optimax-Industrial Filter external suitable for pedestrian loading**

Order no. 340035


**Optimax-Industrial Filter external suitable for vehicle loading**

Order no. 340036

### Accessories

**Cleaning unit Opticlean® external without hose**

Order no. 340041

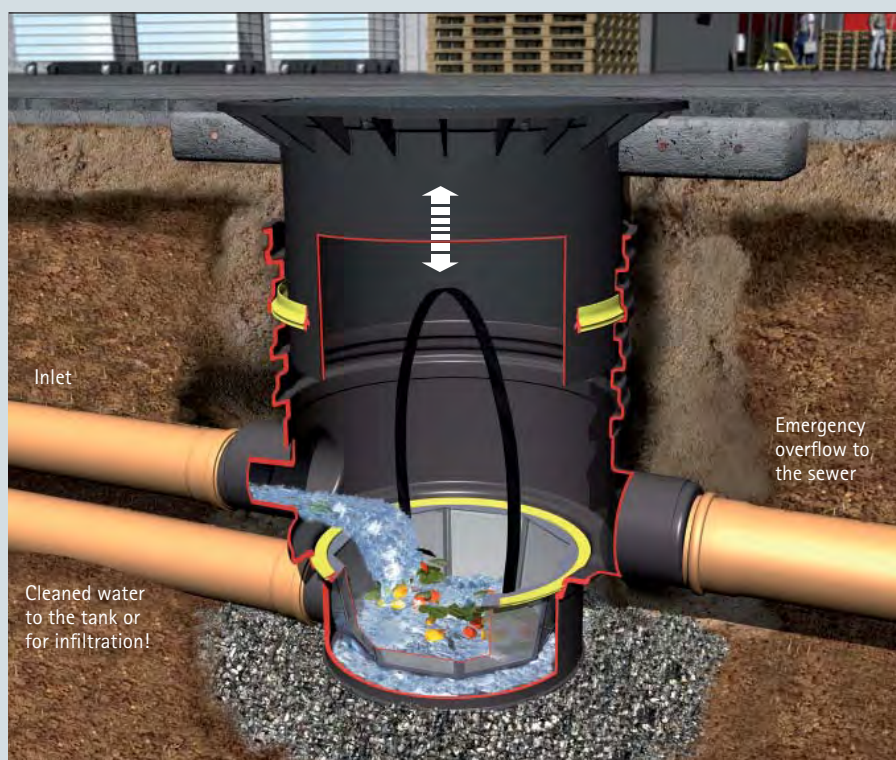

## Universal-Industrial filter 3 external

- | For roof surfaces up to 1200 sqm
- | Continuously variable installation depth of 800 mm - 1200 mm (31.5-47.2") using the telescopic dome shaft
- | Maximum roof surface area of 750 sqm with connections DN 150 and 1200 sqm with DN 200

**Universal-Industrial Filter 3 external suitable for pedestrian loading**

Order no. 340050

**Universal-Industrial Filter 3 external suitable for vehicle loading**

Order no. 340051