


Industrial filter technology

For roof surfaces up to 1,500 sqm

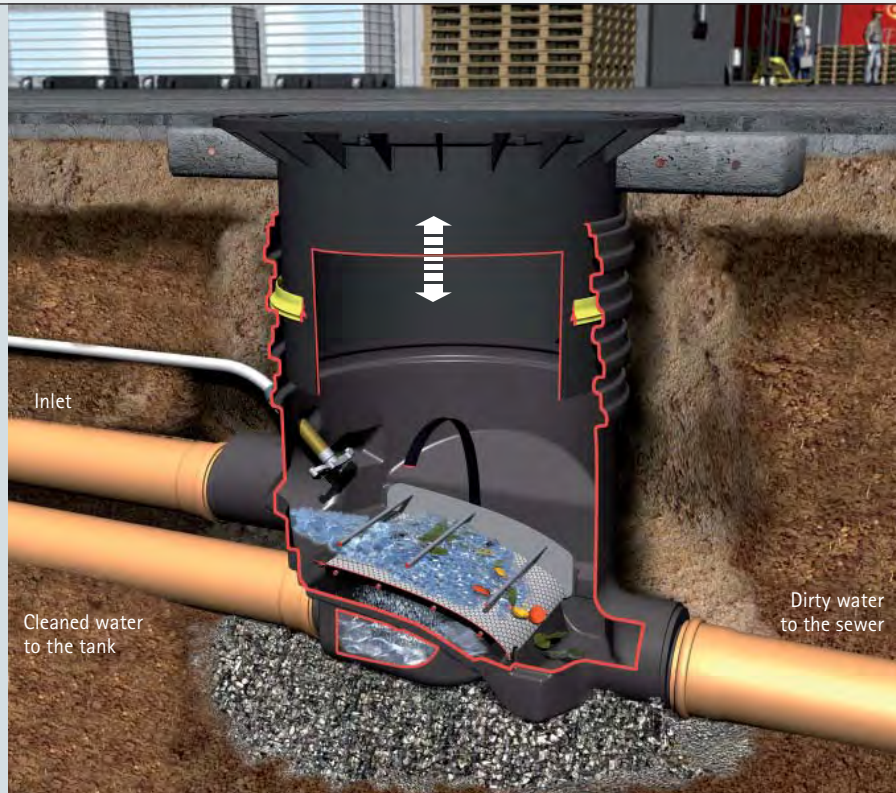

Optimax-Industrial filter external

- | For roof surfaces up to 1500 sqm
- | Patented filter technology Smooth installation depths from 800 – 1200 mm (31.5-47.2") using the telescopic dome shaft Maximum roof surface of 750 sqm with connections DN 150 and 1500 sqm with DN 200

Optimax-Industrial Filter external suitable for pedestrian loading

Order no. 340035


Optimax-Industrial Filter external suitable for vehicle loading

Order no. 340036

Accessories

Cleaning unit Opticlean® external without hose

Order no. 340041

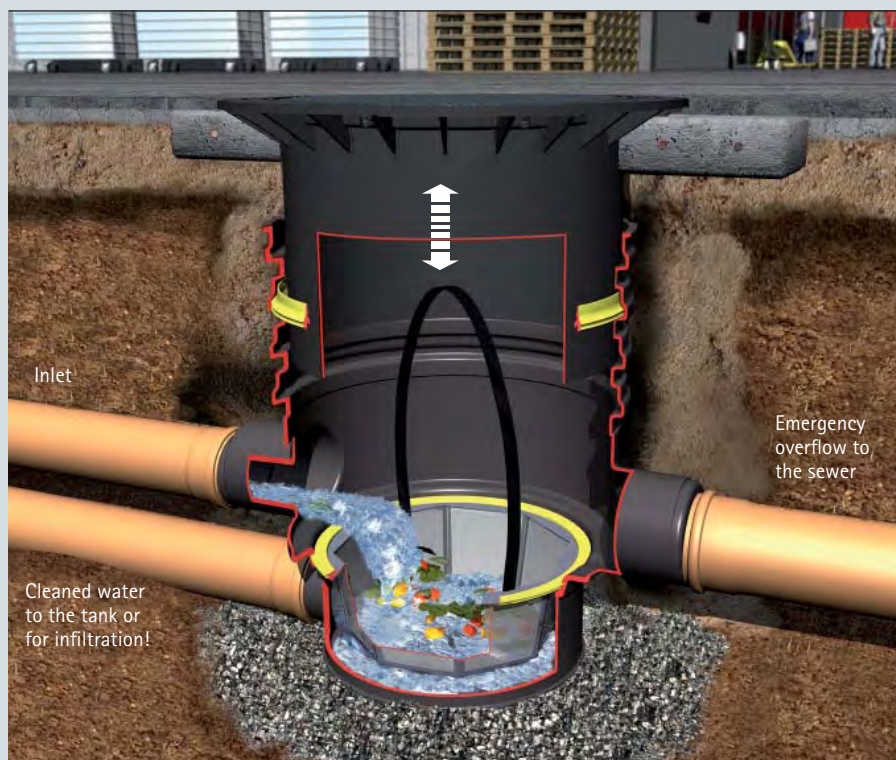

Universal-Industrial filter 3 external

- | For roof surfaces up to 1200 sqm
- | Continuously variable installation depth of 800 mm - 1200 mm (31.5-47.2") using the telescopic dome shaft
- | Maximum roof surface area of 750 sqm with connections DN 150 and 1200 sqm with DN 200

Universal-Industrial Filter 3 external suitable for pedestrian loading

Order no. 340050

Universal-Industrial Filter 3 external suitable for vehicle loading

Order no. 340051